



Engineering, Inc.

Geotechnical Investigation

Beaver River Ranch
1489 West 200 North
Beaver, Beaver, Utah

Prepared For:

Beaver River Ranch, LLC
482 E Steep Mountain Drive
Draper, Utah 84020

September 29, 2025

Report Number: 25-3077-RG4047

Copyright 2025 GEM Engineering, Inc.
All Rights Reserved

September 29, 2025

Beaver River Ranch, LLC
482 E Steep Mountain Drive
Draper, Utah 84020

Subject: Beaver River Ranch
1489 West 200 North
Beaver, Beaver, Utah

Enclosed is our geotechnical investigation report for the subject proposed commercial structure to be constructed at the subject site in Beaver, Utah.

The report details our field exploration and laboratory testing program and presents our analysis, opinions and recommendations for the proposed project.

Moderately collapsible/compressible soils were encountered which will need to be overexcavated and recompacted as outlined in this report.

We appreciate this opportunity to be of service on this phase of the project and look forward to being of service as the project progresses. If you have any questions, please contact this office at your convenience.

Sincerely,
GEM Engineering, Inc.



Brennan L. Stucker, E.I.T.
Field Engineer



Robert W. Corry, P.E., S.E.
President

TABLE OF CONTENTS

	<u>Page No.</u>
1.0 INTRODUCTION	1
1.1 General	1
1.2 Project Description	1
2.0 FIELD EXPLORATION	2
3.0 LABORATORY TESTING	3
4.0 SITE CONDITIONS	4
4.1 Surface Conditions	4
4.2 Subsurface Conditions	4
5.0 ENGINEERING ANALYSES AND RECOMMENDATIONS.....	5
5.1 General	5
5.2 Construction Considerations	5
5.2.1 Foundation Systems	5
5.3 Earthwork	5
5.3.1 Site Preparation and Grading	5
5.3.2 Excavations	7
5.3.3 Material Volume Changes	7
5.3.4 Structural Fill	8
5.4 Foundations	9
5.4.1 Conventional Foundations	9
5.5 Concrete Slabs-On-Grade	11
5.6 Soil Corrosion and Weathering Considerations	12
5.7 Moisture Protection and Drainage	12
5.8 Asphaltic Concrete Pavements	13
6.0 CLOSURE	14
6.1 Limitations	14
6.2 Additional Services	14

APPENDICES

Appendix A

Site Plan	Plate	1
Trench Log	Plate	2
Laboratory Tests Summary	Plate	3
Consolidation Test Results	Plate	4
Unified Soils Classification Chart	Plate	5
Overexcavation, Drainage and Moisture Protection Diagram	Plate	6

1.0 INTRODUCTION

1.1 General

This report presents the results of a geotechnical investigation performed for a proposed commercial structure at 1489 West 200 North in Beaver, Beaver County, Utah. The study was conducted in accordance with the client's authorization.

The purposes of this investigation were to: (1) evaluate the general nature and engineering properties of the subsurface soils at the site; and (2) provide recommendations and opinions regarding general site grading and the design and construction of foundations, concrete slabs-on-grade, and asphaltic concrete pavements. The investigation included a site reconnaissance, subsurface exploration, representative soil sampling, laboratory testing, engineering analyses, and preparation of this report.

The recommendations contained in this report are subject to the limitations presented in the "Limitations" section of the report. We recommend that all individuals reading this report read the limitations section of this document.

1.2 Project Description

We understand that a proposed commercial structure will be constructed at the location described in Beaver, Utah. Structural loads are expected to be relatively low to moderate.

The site plan on Plate 1 shows the approximate trench location with respect to the approximate property lines.

2.0 FIELD EXPLORATION

The subsurface soil conditions were explored by excavating, 1 exploratory trench to a depth of approximately 11 feet below the existing site grade. The approximate location of this exploration is shown on Plate 1. Soils and subsurface conditions encountered in the exploration were classified, logged and recorded at the time of excavation by our field professional. The results of the exploration are presented on the enclosed Plate 2. A key to soil symbols and terms is found on Plate 5.

3.0 LABORATORY TESTING

Representative soil samples from the exploration were tested in the laboratory to verify the field classifications and to evaluate other pertinent engineering characteristics. The soil samples were tested for solubility, Atterberg limits, maximum density, and consolidation behavior. Results are presented on Plates 3 and 4.

4.0 SITE CONDITIONS

4.1 Surface Conditions

As stated previously the site is located at 1489 West 200 North in Beaver, Beaver County, Utah, as shown on Plate 1. At the time of our investigation of the proposed building site it was found to be an agricultural field, to have a slight downward slope from north to south, and was approximately 2.5 acres in size. The site was bordered on the north and west by similar agricultural land, on the east by an existing residential structure, and on the south by 200 North.

4.2 Subsurface Conditions

The on site soils encountered in the excavation generally consisted of medium stiff brown sandy silt which extended to a depth of approximately 9 feet below the existing site grade. This material was underlain by medium dense to dense brown sandy gravel with silt which extended to the bottom of the exploratory trench approximately 11 feet below the existing site grade.

Numerous factors contribute to fluctuations in groundwater levels and locations. The evaluation of these factors was beyond the scope of this study. However, groundwater was not encountered during the exploration. The soils were in a slightly moist to moist condition throughout the depths explored.

The encountered subsurface conditions are described in detail on the enclosed trench log, Plate 2. Due to the nature and depositional characteristics of the native soils, care should be taken in extrapolating subsurface conditions beyond the exploration location.

The laboratory tests results indicated that the on-site soils exhibited a relatively low solubility, low plasticity and a moderate collapse potential.

5.0 ENGINEERING ANALYSIS AND RECOMMENDATIONS

5.1 General

Based on our investigation there are loose, soft and/or collapsible soils located at the site which will require stabilization and/or overexcavation prior to the placement of structural fill. However, it is our opinion that the subject site is suitable for the proposed construction provided that the recommendations contained in this report are followed.

The following sections of this report present our recommendations to reduce the potential for structural damage. They contain specific opinions and recommendations concerning construction considerations, site preparation and grading, structural fill, foundation design, retaining walls, concrete slabs-on-grade, soil corrosion, moisture protection and structural pavement sections.

One of the most critical recommendations to follow in order to reduce potential for structural damage is to set the finished floor slab elevations high enough to facilitate proper drainage away from the structure.

5.2 Construction Considerations

5.2.1 Foundation Systems

After overexcavation and recompaction are completed, the structures can be supported by conventional strip and/or spread footings founded on properly placed and compacted structural fill.

5.3 Earthwork

5.3.1 Site Preparation and Grading

Within the areas to be graded, existing vegetation, loose soils, and debris, should be removed and hauled off the site. Any undocumented fill soils, and soft, loose,

collapsible and/or disturbed native soils should be excavated to expose competent, dense or medium dense native soils.

Based upon soil types and laboratory consolidation tests, the required depth of overexcavation is as follows: A minimum of 3 feet below the bottom of footing elevation or 3 feet below the existing site grade, whichever is greater. Overexcavations should extend laterally beyond the edges of the footing, at each side, at least a distance equal to the depth of overexcavation. In no case shall the total width of excavation be less than the footing width plus 2 times the depth of overexcavation. (width of O.X. + ftg width + width of O.X.)

Slabs-on-grade, exterior concrete flatwork, and pavements should be supported by a zone of properly placed and compacted structural fill. Overexcavations on the order of 18 inches below the supportive gravel layer or 18 inches below the existing site grade, whichever is greater, are required. As an alternative to the above, 10 inches of Type 1 pit run gravel can be substituted for the 18 inches of recompacted native soils. Excavations shall extend laterally at least 2 feet beyond exterior flatwork and pavement areas.

If loose soft or pumping soils are encountered at the bottom of the overexcavations, stabilization and/or additional overexcavation will be required prior to the placement of structural fill. Overexcavations may be terminated if competent, medium-dense granular soils are encountered. A GEM Engineering representative should observe excavation and determine if it is acceptable to terminate the excavation or reduce the overexcavation depth.

The majority of on-site soils, free of organics and debris, should be suitable for reuse as structural fill. If using on-site soils for backfill or structural fill a shrinkage factor of up to 20 percent can be expected.

Following excavation of the unsuitable soils as described above, a representative of this office should observe the excavation bottoms prior to the continuance of grading to verify that unsuitable materials have been removed and that competent soils have been exposed. The native soils exposed after overexcavation should be scarified to a depth of 6 inches and brought to within 2 percent of the optimum moisture content for granular soils and slightly above optimum for fine-grained soils. Soil shall then be compacted to at least 90 percent of the maximum dry density for granular soils and 90 percent of the maximum dry density for fine grained soils as determined by ASTM D1557. The site should then be brought to the proper grade with structural fill as described in the Structural Fill section.

Subgrade materials supporting slabs-on-grade, exterior concrete flatwork, and pavements should be kept moist and not be allowed to dry out and crack. If the subgrade has been disturbed or dried out prior to placement of aggregate base, the exposed soils should be moisture-conditioned and recompactd as outlined in the Structural Fill section of this report.

We recommend that a GEM Engineering representative be allowed to review the grading plans when prepared to evaluate their compatibility with the recommendations of this report.

5.3.2 Excavations

The majority of the soils encountered in our explorations should be excavatable with conventional earthwork equipment. It is also possible that soft pumping soils may be encountered. Pumping soils will need to be stabilized prior to placing of structural fill. Safety of construction personnel is the responsibility of the Contractor.

5.3.3 Material Volume Changes

There will be shrinkage losses when excavating and compacting the on-site soils. An estimated average shrinkage factor of 20 percent is applicable for the loose to

medium-dense near-surface native soils. A subsidence factor of 0.1 should be used in all areas where the surficial soils are scarified and recompacted to a depth of 6 inches.

5.3.4 Structural Fill

All fill placed for the support of slabs-on-grade, exterior concrete flatwork, and pavements should be structural fill. Structural fill may consist of approved excavated on-site or imported fill materials. Structural fill should have a swell potential less than 4 percent under a 60 psf surcharge, have a solubility of less than 3 percent, be free of organics, salts, or inert materials larger than 4 inches nominal size, and be similar in gradation to the on-site soils.

Structural fill should be placed in maximum eight-inch loose lifts and compacted on a horizontal plane, unless otherwise approved by the Geotechnical Engineer. Soils in compacted fills should be compacted to at least 95 percent of the maximum dry density as determined by ASTM D1557 for fine grained soils and 95 percent for granular soils. The moisture content should be within 2 percent of optimum for granular soils and at least 2 percent above optimum for fine-grained soils. Any imported fill materials should be approved prior to importing. Also, prior to placing any fill, the excavations should be observed by a GEM Engineering representative to observe that unsuitable materials have been removed.

Structural fill shall be tested for minimum density compliance by means of a moisture-density gauge in accordance with ASTM D6938 or other approved methods. Moisture-density testing shall be performed at the bottom of overexcavation and every 12 inches vertically until the bottom of footing is reached. Backfill material surrounding basement walls and stem walls moisture-density testing shall be performed beginning at the bottom of footing elevation and continue at intervals of 24 inches vertically until finished grade is reached.

5.4 Foundations

5.4.1 Conventional Foundations

General: Conventional shallow foundations consisting of strip and/or spread footings can be utilized for the support of the proposed building provided that overexcavation is completed in accordance with the requirements and recommendations of this report as described in the Earthwork section.

For frost protection the bottom of exterior conventional spread and strip footings shall be at least 30 inches below the lowest adjacent final compacted subgrade.

Foundations for structures constructed on soils, prepared in accordance with the recommendations and requirements of this report, may be designed for an allowable net bearing pressure of 1600 psf. This bearing pressure may be increased by one-third for load combinations containing seismic or wind loads.

The net allowable bearing pressure can be increased to 2000 psf if pit run gravel is utilized for replacement of all overexcavated soil beneath the structure instead of the native soils. The pit run gravel must have a maximum dry density of at least 135 pcf utilizing ASTM D1557. The pit run gravel must also meet all of the requirements contained in the Structural Fill section of this report.

Prior to constructing the foundations, the footing excavations should be observed by a GEM Engineering representative to confirm that the soil preparation has been completed in accordance with the requirements and recommendations of this report.

Seismicity: The soil is best represented by site class D based on the 2021 International Building Code (IBC). The seismic design category for the 2021 International Residential Code (IRC) is D1.

Settlement: Foundations established in accordance with the recommendations and requirements of this report are estimated to be subject to 1 ½” or less of settlement if the soils beneath the overexcavation do not become moistened. Estimated differential settlement could be on the order of ½ the total settlement.

Lateral Earth Pressures: The following lateral earth pressure equivalent fluid densities shall be used in the design of the structure.

Properly Compacted On-Site Soils

Active Pressure	34 pcf
At Rest Pressure	52 pcf
Passive Pressure	234 pcf

Properly Compacted Imported Granular Soils

Active Pressure	36 pcf
At Rest Pressure	55 pcf
Passive Pressure	288 pcf

Equivalent fluid densities presented above assume that the backfill has a maximum slope of 10:1 and that there will be no build-up of hydrostatic pressure. Any surcharge from adjacent structures or traffic loads should be added to this pressure. When passive pressure is used for resistance to lateral loads the top one foot of soil should be neglected. The maximum allowable passive pressure for lateral load resistance should not exceed 1,600 psf.

The seismic lateral earth pressure coefficient (k_h) is 0.20.

Lateral Load Resistance: Horizontal loads acting on foundations will be resisted by friction acting at the base of foundations and/or passive earth pressures acting against the side of footings and concrete walls. If design makes use of passive earth

pressures, it is important that a GEM Engineering representative be present during backfill placement.

The friction force acting along the base of footings founded on suitable foundation soils may be calculated using a coefficient of friction of 0.40.

Lateral loads acting on buried utility lines may be resisted by thrust blocks reacting against undisturbed native soil or properly placed and compacted structural fill. The passive lateral earth pressure equivalent fluid density and coefficient of friction, previously listed, may be used for thrust block design.

5.5 Concrete Slabs-On-Grade

Satisfactory support for concrete slabs-on-grade and exterior concrete flatwork may be provided by a 6 inch layer of compacted gravel overlying properly placed and compacted structural fill as recommended in the Site Grading section of this report. The layer of compacted gravel may consist of road base or pit-run gravel with a 2-inch maximum particle size and not more than 12% fines passing the No. 200 sieve. The gravel layer should be compacted to at least 95% of the maximum dry density as determined by ASTM D1557.

All concrete slabs should be designed to minimize cracking as a result of shrinkage. Reinforcement requirements shall be provided by the Structural Engineer. Reinforcement should be installed at the mid-height of the slab unless directed otherwise by the Structural Engineer.

Special precautions must be taken during the placement and curing of all concrete slabs. Excessive slump (high water-cement ratio) of the concrete and/or improper curing procedures used during either hot or cold weather conditions could lead to excessive shrinkage, cracking or curling in the slabs. All concrete placement and curing operations shall be performed in accordance with the American Concrete Institute (ACI) Manual.

5.6 Soil Corrosion and Weathering Considerations

Based on similar studies performed in the area, the on-site soils contain salts in sufficient concentration to be considered corrosive to both concrete and metal. Therefore, all concrete in contact with the on-site soils and used in stem walls should contain Type 1L or equivalent sulfate-resistant cement, and should be placed with a maximum four inch slump. Furthermore concrete shall meet requirements specified in Tables 19.3.1.1 & 19.3.2.1 of ACI 318-14 for severe sulfate exposure. Special protection to buried metal pipes and water lines should be considered for long term performance of these underground utilities. Consideration should be given to cathodic protection of buried metal pipes, or to the use of PVC pipe where permitted by local building codes.

5.7 Moisture Protection and Drainage

It is imperative that precautions are taken during and after construction to eliminate, or at least minimize, wetting of foundation soils. Drainage and grading shall be constructed in accordance with the requirements of section 1804.4 of the 2021 International Building Code (IBC). Positive drainage shall be established away from the exterior walls of the structure. The required minimum slope is five percent (5%) in landscape areas and two percent (2%) in pavement areas, for a minimum distance of 10 feet from the structure. Roof runoff and other sources of moisture should not be allowed to infiltrate the soils in the vicinity of, or upslope from, the structure. No roof moisture should infiltrate the soils beneath the foundations.

All utility trenches leading into the structures should be backfilled with compacted non-pervious fill. Special care should be taken during installation of sub floor sewer and water lines to reduce the possibility of future subsurface saturation.

Landscape watering adjacent to the structure should be eliminated. As an additional protection a concrete slab could be placed around the structure to facilitate drainage away from the structure as described above. Any planters adjacent to the structure should have sealed bottoms. It is recommended that desert landscaping techniques be utilized.

5.8 Asphaltic Concrete Pavements

Asphaltic concrete pavement sections were developed for non-dedicated areas. In developing our recommendations, we have assumed that: (1) the pavement section detailed below will contain 3 separate layers including asphalt, road base, and Pit Run gravel underlain by appropriately overexcavated and recompacted native soils; (2) a Traffic Index value of 6.0 for automobile traffic and parking areas is appropriate; and (3) an R-value of 25 is representative of recompacted native soils. The following table presents the minimum recommended structural pavement sections:

Asphaltic Concrete Pavements				
Traffic Condition	Assumed Traffic Index (T.I.)	Asphalt Thickness (in)	Road Base Thickness (in)	Compacted Type 1 Gravel (in)
Light Traffic/Parking	6.0	3.0	6	8

Asphalt and aggregate base material should conform to local requirements. All base material should be compacted to at least (95%) of the maximum dry density (ASTM D1557). Asphalt should be compacted to minimum of (96%) of the Marshall maximum density. Asphaltic concrete and base materials should be tested prior to delivery to the site and during placement to determine conformance with the project specifications.

It is important that parking area grades be set to provide positive drainage to suitable drainage structures. A desirable slope for drainage in paved areas is two percent.

6.0 CLOSURE

6.1 Limitations

The recommendations contained in this report are based on the field exploration, laboratory tests, and our understanding of the proposed construction. The subsurface data used in the preparation of this report were obtained from the exploration made during this investigation. It is possible that variations in the soil and groundwater conditions could exist elsewhere on the site. The nature and extent of variations may not be evident until construction occurs. If any conditions are encountered at the site which are different from those described in this report, GEM Engineering should be immediately notified so that we may make any necessary revisions to recommendations contained in this report. In addition, if the scope of the proposed construction changes from that described in this report, GEM Engineering should likewise be notified.

This report was prepared in accordance with the generally accepted standard of practice at the time the report was written. Although some potential geologic hazards may be identified in this Geotechnical Investigation Report, this is NOT a Geologic Hazards Report and should not be regarded as such. No warranty, express or implied, is made. It is the Client's responsibility to see that all parties to the project, including the Designer, Contractor, Subcontractors, etc., are made aware of this report in its entirety. The use of information contained in this report for bidding purposes should be done at the Contractor's option and risk. GEM Engineering will not accept the responsibility for damage caused by the uncontrolled action of water at the site.

6.2 Additional Services

The recommendations made in this report are based on the assumption that an adequate program of tests and observations will be made during the construction to verify compliance with the recommendations. These tests and observations should include, but not necessarily be limited to, the following:


- Observations and testing during site preparation, earthwork and structural fill placement
- Observations of footing excavations
- Consultation as may be required during construction

We also recommend that project plans and specifications be reviewed by us to verify compatibility with our conclusions and recommendations. Additional information concerning the scope and cost of these services can be obtained from our office.

Appendix A

SITE PLAN



Notes:
Key:  Approximate Trench Location
Plan: Not to Scale

PROJECT:	Beaver River Ranch 1489 West 200 North, Beaver, Utah
Client:	Beaver River Ranch, LLC
Report No:	25-3077-RG4047








Plate:
1

TRENCH LOG Trench No. 1

Sheet 1 of 1

Location: See Site Plan **Elevation:** Not Measured **Date Excavated:** 9/15/2025

Depth (ft)	Tests ¹	Sample	USCS Symbol ²	Soil Description (Additional comments below)	Color	Relative Moisture ³	Density ⁴	Cementation ⁵	Max size Particle ⁶
0									
5	At, M Sol, C P		ML	- Sandy Silt - Pinhole Voids	Brown	M	MS	--	CG
10	At, M Sol, P		GW GM GW GM	- Sandy Gravel with Silt	Brown	SM	MD to D	--	C
				Bottom @ 11'					
15									
20									

Sample:  Drive Sample  Bag Sample  Bucket Sample

- 1) At = Atterberg, M = Moisture, Sol = Solubility, E = Expansion, C = Consol, P = Proctor, CS = Coarse Sieve
- 2) See Plate 5 for explanation of Unified Soil Classification System
- 3) D = Dry, SM = Slightly Moist, M = Moist, VM = Very Moist, W = Wet
- 4) Coarse Grain: VL = Very Loose, L = Loose, MD = Medium Dense, D = Dense, VD = Very Dense
Fine Grain: VSF = Very Soft, SF = Soft, MS = Medium Stiff, S = Stiff, VS = Very Stiff, H = Hard
- 5) W = Weak cementation, M = Moderate cementation, S = Strong cementation
- 6) B=Boulder, C= Cobble, CG=Coarse Gravel (3" - 3/4"), FG=Fine Gravel (3/4" - 1/4"), CS=Coarse Sand (#10-#4), MS=Medium Sand (#40 - #10), FS=Fine Sand (#200 - #40), F=Fines

Notes:
Groundwater:
Not encountered

Caving of side walls:
None noted

PROJECT: Beaver River Ranch
1489 West 200 North, Beaver, Utah

Client: Beaver River Ranch, LLC

Report No: 25-3077-RG4047



Plate:
2

CONSOLIDATION TEST DATA



Sample Location - T-1 @ 4'
Water added at 1000 psf

Load (psf)	Percent Consolidation	Net Percent Consolidation *
500	1.52	0.00
1000	2.07	0.55
1000 + H ₂ O	3.22	1.70
2000	6.00	4.48
4000	8.87	7.35
500	8.19	6.67

* Net consolidation assumes that existing native pressure on soil is approximately equal to 500 psf

PROJECT:	Beaver River Ranch 1489 West 200 North, Beaver, Utah
Client:	Beaver River Ranch, LLC
Report No:	25-3077-RG4047

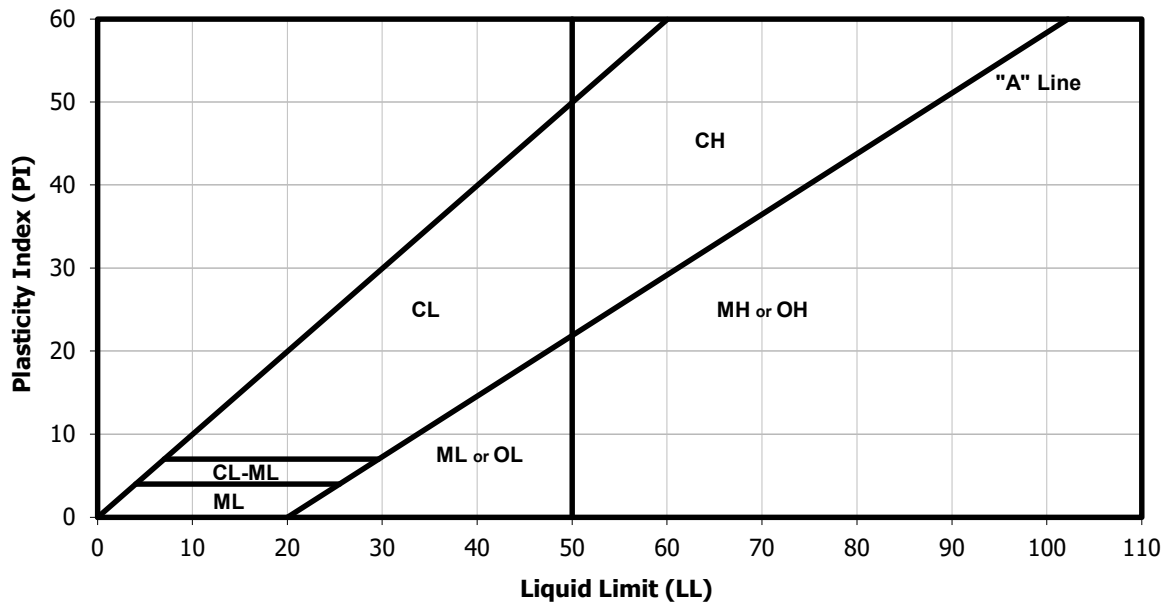


Plate:
4

THE UNIFIED SOIL CLASSIFICATION SYSTEM (USCS)

	Major Division	Symbol	Color	Typical Group Names	
COARSE GRAINED SOILS 50% or more is retained (larger than) the No. 200 sieve.	Gravels	Clean Gravels	GW	Well graded gravels, gravel sand mixtures, little or no fines	
	More than 50 % of coarse part is larger than the No. 4 sieve.	Less than 5% fines	GP	Poorly graded gravels/gravel sand mixtures	
		Gravels with Fines	GM	Silty gravels, gravel-sand-silt mixtures	
		More than 12% fines	GC	Clayey gravels, gravel-clay-sand mixtures	
	Sands	Clean Sands	SW	Well graded sands, gravelly sands, little or no fines	
	More than 50 % of coarse part is smaller than the No. 4 sieve.	Less than 5% fines	SP	Poorly graded sands or gravelly sands, little or no fines	
		Sands w/ Fines	SM	Silty sands, sand-silt mixtures	
		More than 12% fines	SC	Clayey sands, sand clay mixtures	
	FINE GRAINED SOILS 50% or more passes (smaller than) the No. 200 sieve.	Silts and Clays Liquid Limit less than 50		ML	Inorganic silts and very fine sands, rock flour, silty or clayey fine sands or clayey silts with low plasticity
				CL-ML	Inorganic clay-silt mixture and very fine sand, silty or clayey fine sands or clayey silts with low plasticity.
CL				Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays	
OL				Organic silts and organic silty clays of low plasticity	
Silts and Clays Liquid Limit 50 or more		MH	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts		
		CH	Inorganic clays of high plasticity, fat clays		
		OH	Organic clays or medium to high plasticity, organic silts		
		Highly Organic Soils		PT	Peat and other highly organic silts

PLASTICITY CHART



PROJECT: Beaver River Ranch
 1489 West 200 North, Beaver, Utah


Client: Beaver River Ranch, LLC

Report No: 25-3077-RG4047




Plate:
5

OVEREXCAVATION, DRAINAGE AND MOISTURE PROTECTION DIAGRAM

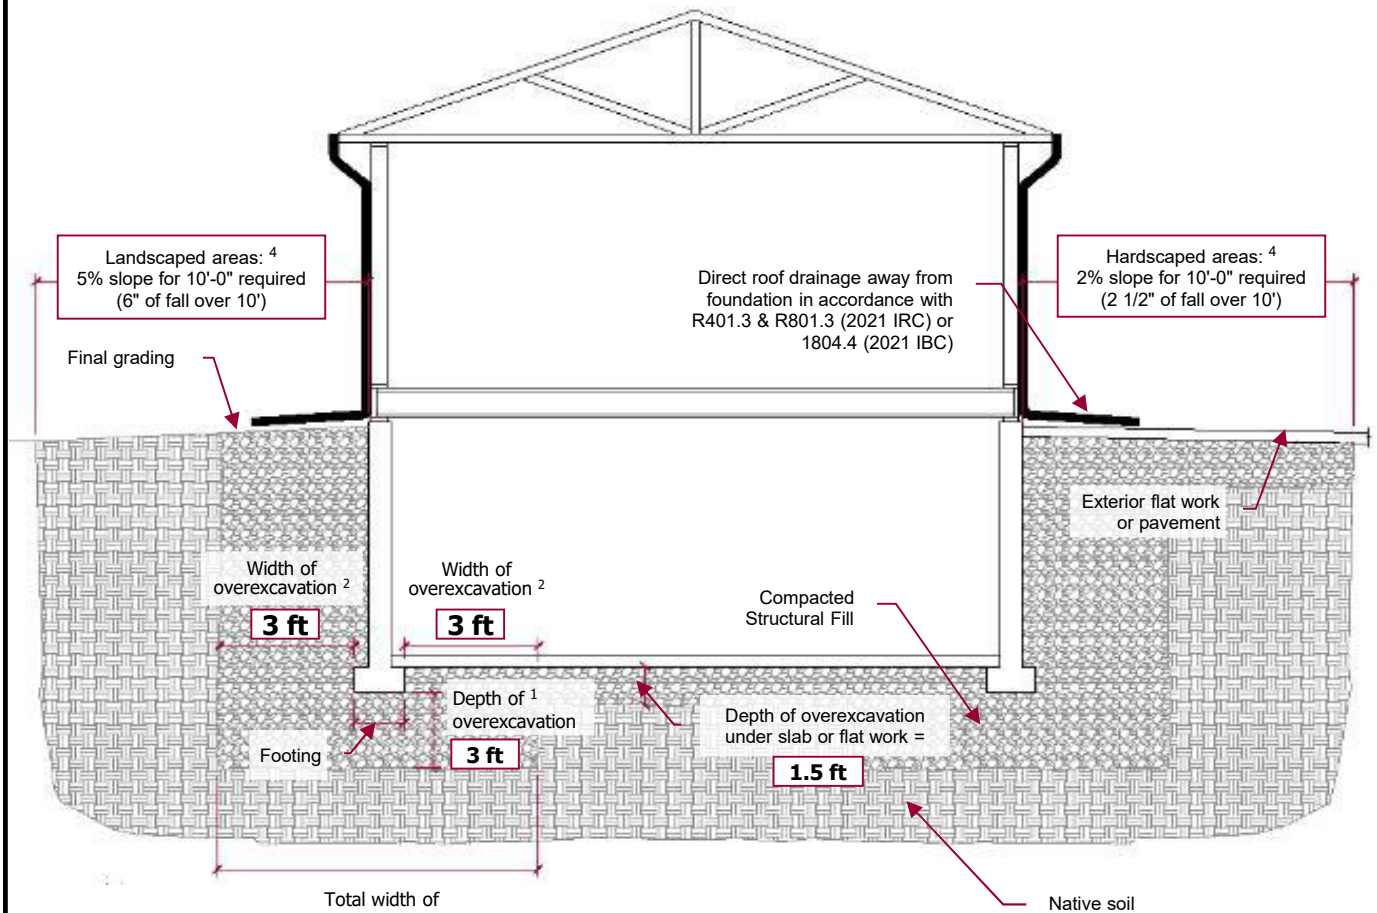

Basement Foundation

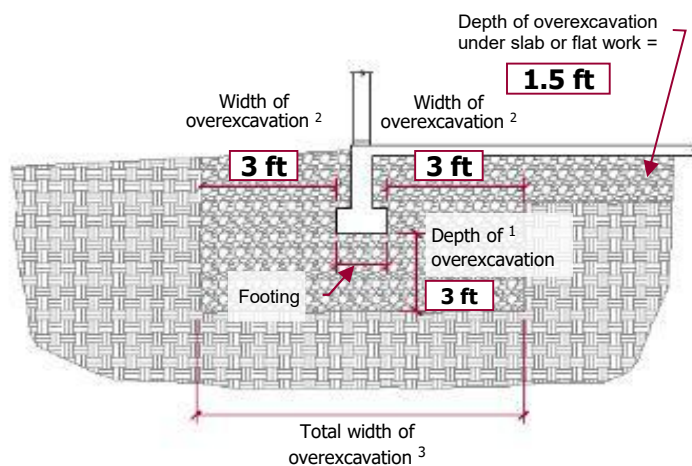

Slab-On-Grade Foundation

- 1 The depth of overexcavation shall extend from the bottom of the footing or existing site grade whichever is **GREATER**.
- 2 The width of overexcavation is equal to 5ft past the edge of ftg or equal to the depth of overexcavation which is **GREATER**.
In some cases GEM Engineering may approve a width of lateral overexcavation less than 5'-0" but it shall never be less than the required depth of overexcavation.
- 3 The total width of overexcavation is equal to the width of the footing plus 2x the width of lateral overexcavation.
- 4 Drainage and gradation shall be constructed in accordance with the requirements of section R401.3 & R801.3 of the 2021 IRC or section 1804.4 of the 2021 IBC. Refer to geotechnical report for additional drainage & grading requirements & recommendations.
- 5 Refer to section 5.3.4 for moisture-density testing requirements.

PROJECT: Beaver River Ranch
1489 West 200 North, Beaver, Utah

Client: Beaver River Ranch, LLC

Report No: 25-3077-RG4047

GEM
ENGINEERING, INC.

Plate:
6